

Product data sheet

Specifications



industrial timing relay - 0.1..10 s - type A - 24 V AC/DC, 110..240 V AC - 1 C/O

RE8TA11BUTQ

⚠ Discontinued on: Jan 29, 2021

⚠ Discontinued

Main

| | |
|-------------------------------|---------------------------------|
| Range of Product | Zelio Time |
| Product or Component Type | Optimum industrial timing relay |
| Component name | RE8 |
| Time delay type | A |
| Time delay range | 0.1...10 s |
| Sale per indivisible quantity | 10 |

Complementary

| | |
|---|--|
| Discrete output type | Relay |
| Contacts material | 90/10 silver nickel contacts |
| Width pitch dimension | 0.9 in (22.5 mm) |
| [Us] rated supply voltage | 110...240 V AC 50/60 Hz 24 V AC/DC 50/60 Hz |
| Voltage range | 0.9...1.1 Us |
| Connections - terminals | Screw terminals, 2 x 1.5 mm ² flexible with cable end Screw terminals, 2 x 2.5 mm ² flexible without cable end |
| Tightening torque | 5.3...9.7 lbf.in (0.6...1.1 N.m) |
| Setting accuracy of time delay | +/- 20 % of full scale |
| Repeat accuracy | < 1 % |
| Voltage drift | < 2.5 %/V |
| Temperature Drift | < 0.2 %/°C |
| Minimum pulse duration | 26 ms |
| Reset time | 50 ms |
| Maximum switching voltage | 250 V |
| Mechanical durability | 20000000 cycles |
| [Ith] conventional free air thermal current | 8 A |
| Maximum [Ie] rated operational current | 2 A DC-13 24 V 158 °F (70 °C) IEC 60947-5-1/1991 2 A DC-13 24 V 158 °F (70 °C) VDE 0660 3 A AC-15 24 V 158 °F (70 °C) IEC 60947-5-1/1991 3 A AC-15 24 V 158 °F (70 °C) VDE 0660 0.1 A DC-13 250 V 158 °F (70 °C) IEC 60947-5-1/1991 0.1 A DC-13 250 V 158 °F (70 °C) VDE 0660 0.2 A DC-13 115 V 158 °F (70 °C) IEC 60947-5-1/1991 0.2 A DC-13 115 V 158 °F (70 °C) VDE 0660 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|--------------------------------|---|
| Minimum switching capacity | 10 mA 12 V |
| Marking | CE |
| Overvoltage category | III IEC 60664-1 |
| [UI] rated insulation voltage | 250 V IEC 300 V CSA |
| Supply disconnection value | > 0.1 Uc |
| Operating position | Any position without derating |
| Surge withstand | 2 kV IEC 61000-4-5 level 3 |
| Power consumption in VA | 0.7 VA 24 V 1.8 VA 110 V 8.5 VA 240 V |
| Maximum power consumption in W | 0.5 W 24 V |
| Terminal description | ALT (A1-B1)CO (15-16-18)OC_OFF |
| Height | 3.07 in (78 mm) |
| Width | 0.9 in (22.5 mm) |
| Depth | 3.1 in (80 mm) |
| Net Weight | 0.24 lb(US) (0.11 kg) |

Environment

| | |
|---------------------------------------|--|
| Immunity to microbreaks | 3 ms |
| Standards | EN/IEC 61812-1 |
| Product Certifications | CSA UL GL |
| Ambient Air Temperature for Storage | -40...185 °F (-40...85 °C) |
| Ambient Air Temperature for Operation | -4...140 °F (-20...60 °C) |
| Relative humidity | 15...85 % 3K3 IEC 60721-3-3 |
| Vibration resistance | 0.35 mm 10...55 Hz)IEC 60068-2-6 |
| IP degree of protection | IP20 terminals) IP50 casing) |
| Pollution degree | 3 IEC 60664-1 |
| Dielectric test voltage | 2.5 kV |
| Non-dissipating shock wave | 4.8 kV |
| Resistance to electromagnetic fields | 9.1 V/m (10 V/m) IEC 61000-4-3 level 3 |
| Resistance to fast transients | 2 kV IEC 61000-4-4 level 3 |
| Disturbance radiated/conducted | CISPR 11 group 1 - class A CISPR 22 - class A |

Ordering and shipping details

| | |
|-------------------|-------------------------------|
| Category | 22376-RELAYS-MEASUREMENT(RM4) |
| Discount Schedule | CP2 |
| GTIN | 00785901449140 |
| Returnability | No |

Country of origin

ID

Contractual warranty


Warranty

18 months


Dimensions Drawings

Width 22.5 mm

Rail Mounting

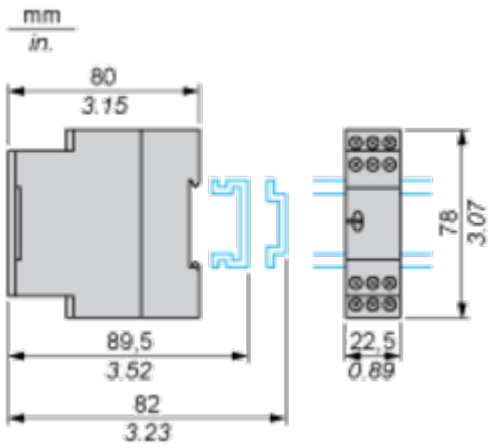


Screw Fixing

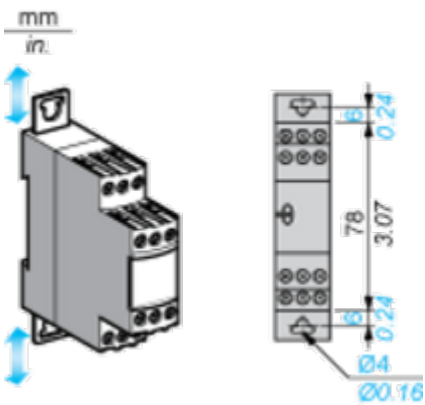


Connections and Schema

Internal Wiring Diagram



Recommended Application Wiring Diagram




Performance Curves

Performance Curves

A.C. Load Curve 1


Electrical durability of contacts on resistive loading millions of operating cycles

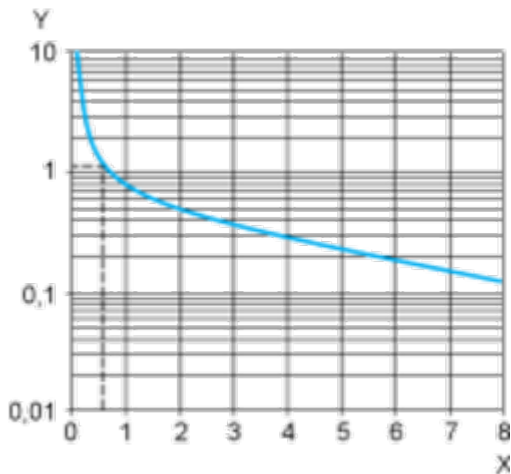

X Current broken in A
 Y Millions of operating cycles

A.C. Load Curve 2


Reduction factor k for inductive loads (applies to values taken from durability curve 1).

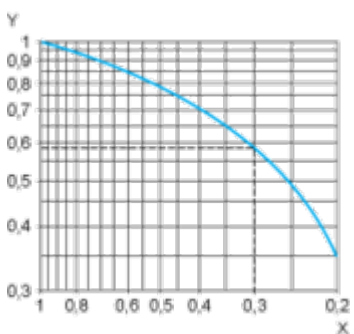


X Power factor on breaking (cos φ)
 Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and cos φ = 0.3. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2.

For cos φ = 0.3: k = 0.6 The electrical durability therefore becomes: 1.5 10⁶ operating cycles x 0.6 = 900 000 operating cycles.



D. C. Load Limit Curve

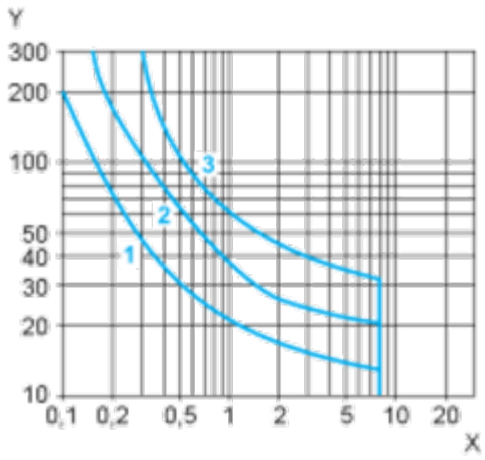

X Current in A

Y Voltage in V

1 L/R = 20 ms

2 L/R with load protection diode

3 Resistive load

Technical Description

Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output







Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Legend

-  Relay de-energised
-  Relay energised
-  Output open
-  Output closed

| | |
|----------|--|
| C | Control contact |
| G | Gate |
| R | Relay or solid state output |
| R1/R2 | 2 timed outputs |
| R2 inst. | The second output is instantaneous if the right position is selected |
| T | Timing period |
| Ta - | Adjustable On-delay |
| Tr - | Adjustable Off-delay |
| U | Supply |