

Product datasheet

Specifications



socket RXZ - mixed contact -10A - < 250V - screw clamp -for relay RXM2.., RXM4..

RXZE2M114

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact Plug-in relay REXL with 2 C/O contact Plug-in relay REXL with 4 C/O contact Plug-in relay 782H with 4 C/O contact
Device short name	RXZ
[Ith] conventional free air thermal current	10 A
Product or component type	Socket
Contacts type and composition	4 C/O

Complementary

[Ue] rated operational voltage	< 250 V conforming to IEC < 300 V conforming to UL
Connections - terminals	Screw clamp terminals, 1 x 0.34...1 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 2 x 0.34...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 1 x 0.5...1 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Shape of pin	Flat
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Wire stripping length	8 mm
Contact terminal arrangement	Mixed
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	30 mm
Net weight	0.051 kg

Environment

IP degree of protection	IP20 conforming to IEC 60529
-------------------------	------------------------------

Dielectric strength	2500 V
Standards	IEC 61984
Product certifications	UL CSA Lloyd's
Marking	CE
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.600 cm
Package 1 Width	3.100 cm
Package 1 Length	7.000 cm
Package 1 Weight	52.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	7.600 cm
Package 2 Width	8.900 cm
Package 2 Length	15.500 cm
Package 2 Weight	552.000 g
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	11.572 kg

Contractual warranty

Warranty	12 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[How this information helps you >](#)

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	1
---	---

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Use Better

Materials and Packaging

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

REACH Regulation	REACH Declaration
------------------	-----------------------------------

China RoHS Regulation	China RoHS declaration
-----------------------	--

Use Again

Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

WEEE




The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Take-back

No

Dimensions Drawings


Dimensions

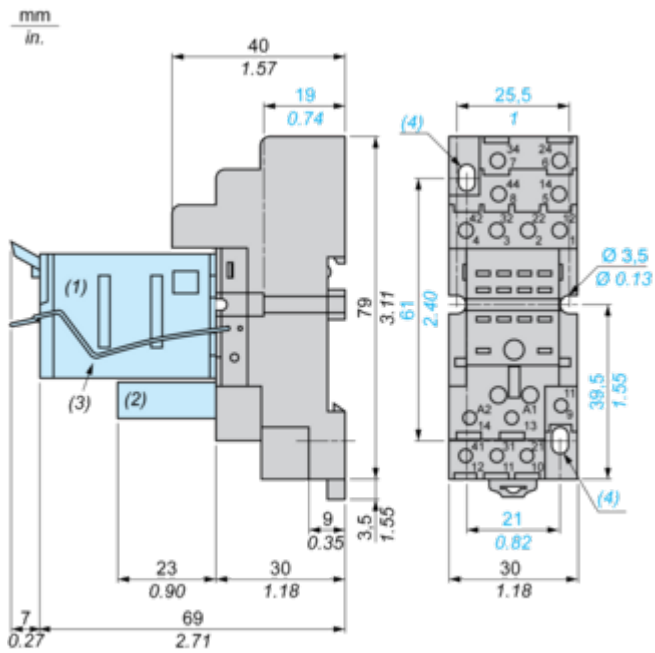

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\text{Ø } 3.5 \text{ mm} \times 6.5 \text{ mm} / \text{Ø } 0.13 \text{ in.} \times 0.25 \text{ in.}$

Connections and Schema

Wiring Diagram

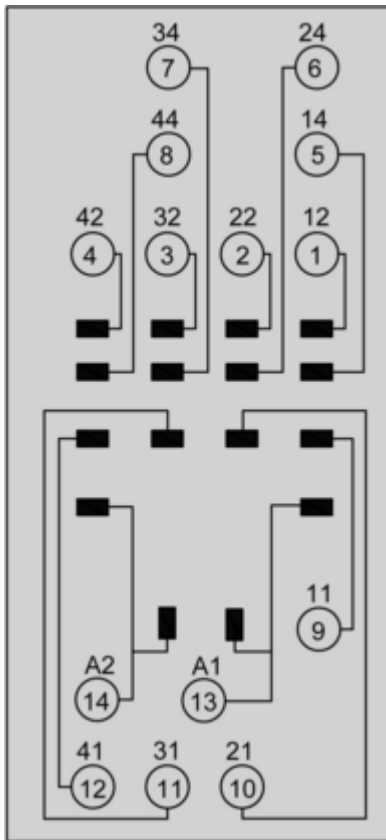

Technical Illustration

Dimensions

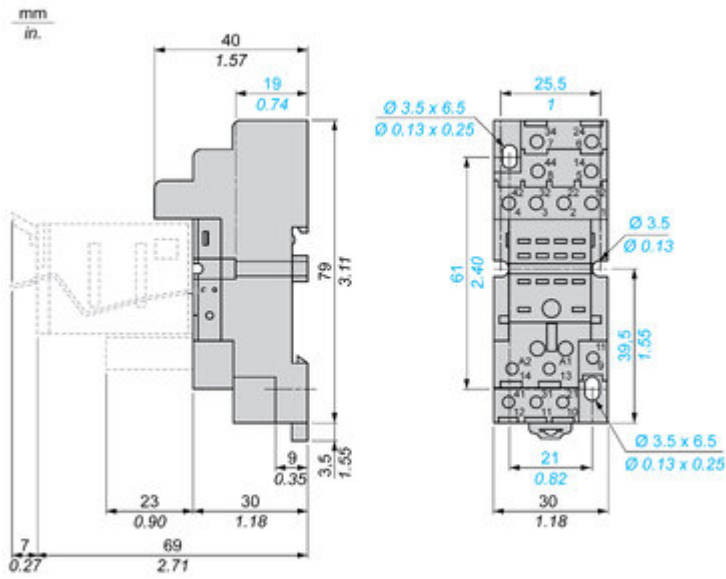


Image of product / Alternate images

Alternative



