

Product data sheet

Specifications



IEC contactor, TeSys Deca, nonreversing, 65A, 40HP at 480VAC, up to 100kA SCCR, 3 phase, 3 NO, 48VAC 50/60Hz coil, open

LC1D65AE7

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 386.40 USD

Main

Range	TeSys TeSys Deca
Range of Product	TeSys Deca
Product or Component Type	Contactor
Device short name	LC1D
Contactor application	Motor control Resistive load
Utilisation category	AC-4 AC-1 AC-3 AC-3e
Poles description	3P
[Ue] rated operational voltage	Power circuit <= 690 V AC 25...400 Hz Power circuit <= 300 V DC
[Ie] rated operational current	80 A (at <140 °F (60 °C)) at <= 440 V AC AC-1 for power circuit 65 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 65 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit
[Uc] control circuit voltage	48 V AC 50/60 Hz

Complementary

Motor power kW	11 kW at 400 V AC 50/60 Hz (AC-4) 18.5 kW at 220...230 V AC 50/60 Hz (AC-3) 30 kW at 380...400 V AC 50/60 Hz (AC-3) 37 kW at 500 V AC 50/60 Hz (AC-3) 37 kW at 660...690 V AC 50/60 Hz (AC-3) 18.5 kW at 220...230 V AC 50/60 Hz (AC-3e) 30 kW at 380...400 V AC 50/60 Hz (AC-3e) 37 kW at 500 V AC 50/60 Hz (AC-3e) 37 kW at 660...690 V AC 50/60 Hz (AC-3e)
Maximum Horse Power Rating	40 hp at 460/480 V AC 50/60 Hz for 3 phase motors 5 hp at 115 V AC 50/60 Hz for 1 phase motors 10 hp at 230/240 V AC 50/60 Hz for 1 phase motors 20 hp at 200/208 V AC 50/60 Hz for 3 phase motors 20 hp at 230/240 V AC 50/60 Hz for 3 phase motors 50 hp at 575/600 V AC 50/60 Hz for 3 phase motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

[Ith] conventional free air thermal current	10 A (at 140 °F (60 °C)) for signalling circuit 80 A (at 140 °F (60 °C)) for power circuit
Irms rated making capacity	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 1000 A at 440 V for power circuit conforming to IEC 60947
Rated breaking capacity	1000 A at 440 V for power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	640 A 104 °F (40 °C) - 10 s for power circuit 900 A 104 °F (40 °C) - 1 s for power circuit 110 A 104 °F (40 °C) - 10 min for power circuit 260 A 104 °F (40 °C) - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
Associated fuse rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 125 A gG at <= 690 V coordination type 1 for power circuit 125 A gG at <= 690 V coordination type 2 for power circuit
Average impedance	1.5 mOhm - Ith 80 A 50 Hz for power circuit
Power dissipation per pole	9.6 W AC-1 6.3 W AC-3 6.3 W AC-3e
[Ui] rated insulation voltage	Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL Power circuit 690 V IEC 60947-4-1
Overvoltage category	III
Pollution degree	3
[Uimp] rated impulse withstand voltage	6 kV IEC 60947
Safety reliability level	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
Mechanical durability	6 Mcycles
Electrical durability	1.4 Mcycles 80 A AC-1 <= 440 V 1.45 Mcycles 65 A AC-3 <= 440 V 1.45 Mcycles 65 A AC-3e <= 440 V
Control circuit type	AC 50/60 Hz standard
Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 Uc -40...158 °F (-40...70 °C) drop-out AC 50/60 Hz 0.8...1.1 Uc -40...140 °F (-40...60 °C) operational AC 50 Hz 0.85...1.1 Uc -40...140 °F (-40...60 °C) operational AC 60 Hz 1...1.1 Uc 140...158 °F (60...70 °C) operational AC 50/60 Hz
Inrush power in VA	140 VA 60 Hz cos phi 0.75 (at 68 °F (20 °C)) 160 VA 50 Hz cos phi 0.75 (at 68 °F (20 °C))
Hold-in power consumption in VA	13 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C)) 15 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C))
Heat dissipation	4...5 W at 50/60 Hz
Operating time	4...19 ms opening 12...26 ms closing
Maximum operating rate	3600 cyc/h 140 °F (60 °C)
Maximum operating rate	3600 cyc/h at 60 °C

Connections - terminals	<p>Control circuit: screw clamp terminals 2 0.002...0.004 in² (1...2.5 mm²) - cable stiffness: flexible with cable end</p> <p>Control circuit: screw clamp terminals 1 0.002...0.006 in² (1...4 mm²) - cable stiffness: flexible without cable end</p> <p>Control circuit: screw clamp terminals 2 0.002...0.006 in² (1...4 mm²) - cable stiffness: flexible without cable end</p> <p>Control circuit: screw clamp terminals 1 0.002...0.006 in² (1...4 mm²) - cable stiffness: flexible with cable end</p> <p>Control circuit: screw clamp terminals 1 0.002...0.006 in² (1...4 mm²) - cable stiffness: solid without cable end</p> <p>Control circuit: screw clamp terminals 2 0.002...0.006 in² (1...4 mm²) - cable stiffness: solid without cable end</p> <p>Power circuit: screw connection 1 0.002...0.05 in² (1...35 mm²) - cable stiffness: flexible without cable end</p> <p>Power circuit: screw connection 2 0.002...0.04 in² (1...25 mm²) - cable stiffness: flexible without cable end</p> <p>Power circuit: screw connection 1 0.002...0.05 in² (1...35 mm²) - cable stiffness: flexible with cable end</p> <p>Power circuit: screw connection 2 0.002...0.04 in² (1...25 mm²) - cable stiffness: flexible with cable end</p> <p>Power circuit: screw connection 1 0.002...0.05 in² (1...35 mm²) - cable stiffness: solid without cable end</p> <p>Power circuit: screw connection 2 0.002...0.04 in² (1...25 mm²) - cable stiffness: solid without cable end</p>
--------------------------------	---

Tightening torque	<p>Control circuit 15.05 lbf.in (1.7 N.m) EverLink BTR screw connectors flat Ø 6 mm</p> <p>Control circuit 15.05 lbf.in (1.7 N.m) EverLink BTR screw connectors Philips No 2</p> <p>Power circuit 70.8 lbf.in (8 N.m) EverLink BTR screw connectors 0.04...0.05 in² (25...35 mm²) hexagonal 0.2 in (4 mm)</p> <p>Power circuit 44.3 lbf.in (5 N.m) EverLink BTR screw connectors 0.002...0.04 in² (1...25 mm²) hexagonal 0.2 in (4 mm)</p> <p>Control circuit 15.05 lbf.in (1.7 N.m) EverLink BTR screw connectors pozidriv No 2</p> <p>Power circuit 22.1 lbf.in (2.5 N.m) EverLink BTR screw connectors pozidriv No 2</p>
--------------------------	---

Auxiliary contact composition	1 NO + 1 NC
--------------------------------------	-------------

Auxiliary contacts type	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
--------------------------------	--

Signalling circuit frequency	25...400 Hz
-------------------------------------	-------------

Minimum switching voltage	17 V for signalling circuit
----------------------------------	-----------------------------

Minimum switching current	5 mA for signalling circuit
----------------------------------	-----------------------------

Insulation resistance	> 10 MOhm for signalling circuit
------------------------------	----------------------------------

Non-overlap time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
-------------------------	---

Mounting Support	Plate Rail
-------------------------	---------------

Environment

Standards	<p>EN 60947-4-1</p> <p>EN 60947-5-1</p> <p>IEC 60947-4-1</p> <p>IEC 60947-5-1</p> <p>CSA C22.2 No 14</p> <p>UL 60947-4-1</p> <p>IEC 60335-2-40:Annex JJ</p> <p>UL 60335-2-40:Annex JJ</p> <p>IEC 60335-1:Clause 30.2</p>
------------------	--

Product Certifications	<p>CCC</p> <p>UL</p> <p>CB Scheme</p> <p>CSA</p> <p>CE</p> <p>UKCA</p> <p>Marine</p> <p>EAC</p>
-------------------------------	---

IP degree of protection	IP20 front face IEC 60529
--------------------------------	---------------------------

Protective treatment	THIEC 60068-2-30
-----------------------------	------------------

Climatic withstand	IACS E10 exposure to damp heat IEC 60947-1 Annex Q category D exposure to damp heat
Permissible ambient air temperature around the device	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating
Operating altitude	0...9842.52 ft (0...3000 m)
Fire resistance	1562 °F (850 °C) IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz) Vibrations contactor closed 4 Gn, 5...300 Hz) Shocks contactor closed 15 Gn for 11 ms) Shocks contactor open 10 Gn for 11 ms)
Height	4.8 in (122 mm)
Width	2.2 in (55 mm)
Depth	4.7 in (120 mm)
Net Weight	1.90 lb(US) (0.86 kg)

Ordering and shipping details

Category	US10I1222357
Discount Schedule	0112
GTIN	3389119408967
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.4 in (6.2 cm)
Package 1 Width	5.3 in (13.5 cm)
Package 1 Length	6.0 in (15.2 cm)
Package 1 Weight	32.7 oz (926.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	5.9 in (15.0 cm)
Package 2 Width	11.8 in (30.0 cm)
Package 2 Length	15.7 in (40.0 cm)
Package 2 Weight	22.040 lb(US) (9.997 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	160
Package 3 Height	30.3 in (77.0 cm)
Package 3 Width	31.5 in (80.0 cm)
Package 3 Length	23.6 in (60.0 cm)
Package 3 Weight	369.19 lb(US) (167.46 kg)

Contractual warranty

Warranty

18 months

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free


✓ Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Compliant EU RoHS Declaration
China Rohs Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

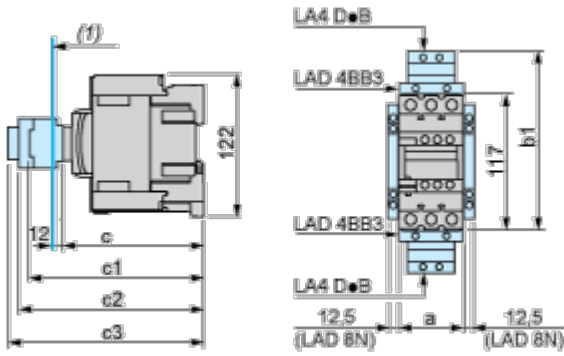

(1) Minimum electrical clearance

LC1		D40A...D65A
a		55
b1	with LA4 D•2	–
	with LA4 DB3 or LAD 4BB3	136
	with LA4 DF, DT	157
	with LA4 DM, DW, DL	166
c	without cover or add-on blocks	118
	with cover, without add-on blocks	120
c1	with LAD N (1 contact)	–
	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK10, LAD 6DK	163
c3	with LAD T, R, S	171
	with LAD T, R, S and sealing cover	175

Connections and Schema

Wiring

